

Dräger X-dock® 5300/6300/6600 Test and calibration station for portable gas detection instruments

The Dräger X-dock series provides you with full control of your portable Dräger gas detection instruments. Automatic bump tests and calibrations with reduced test gas consumption and short testing times save time and money. Comprehensive documentation and evaluations provide you with a clear overview.



D-53186-2012

AS VERSATILE AS YOUR REQUIREMENTS

The X-dock is available in a wide variety of versions. The X-dock 5300 includes a master station including a module for a gas detection instrument from the X-am 1/2/5x00 or Pac family. It is immediately ready to use. The X-dock 6300 and 6600 versions can be configured freely. They consist of a master station and can be expanded with up to 10 modules for X-am 1/2/5x00 and/or Pac¹ gas detection instruments.

EASIER THAN EVER BEFORE

Insert the device, close the lid and remove it when the indicator goes „green“ – a test with the X-dock is just that simple. It immediately detects all sensor combinations. Furthermore, the X-dock automatically tests and adjusts when all required test gases are connected. The station works independently and can be configured and used without a PC. The station is operated via an integrated touchscreen. A gas detection instrument is detected as soon as it is inserted, and all data is documented in the database.

MORE SAFETY THANKS TO COMPLETE DOCUMENTATION

Do you need to document whether or not your devices are ready for operation? Who tested which device when, and what the result was? The X-dock stores all of the relevant data and reads the collected information from the gas detection instruments for subsequent evaluations – providing you with complete control every step of the way. You can use the reporting function (report wizard) to create customised reports. Furthermore, you can print a calibration certificate right at the stations, since the X-dock series supports standard PostScript-compatible USB printers. This functionality allows the user to manage all requirements of EN 60079-29-1 and EN 60079-29-2.

AUTOMATICALLY REDUCED COSTS

With a reduced gas flow (300 mL/min instead of 500 mL/min) per module, you save costs on test gases. Short testing times reduce the overall maintenance efforts. The valve concept (patent pending) requires one pump only, resulting in the need for less wear and tear parts. The valves automatically switch the test gases and – when connected – the compressed air as well.



D-47836-2012

Dräger X-dock 5300 with X-am 125 module and mounted test gas cylinder.



D-47820-2012


Dräger X-dock 5300 with Pac module.



D-47894-2012

Dräger X-dock 6300 with Pac and X-am module.

¹⁾ Pac 7000 = available | Pac 35/5500 firmware to follow until the end of 2012

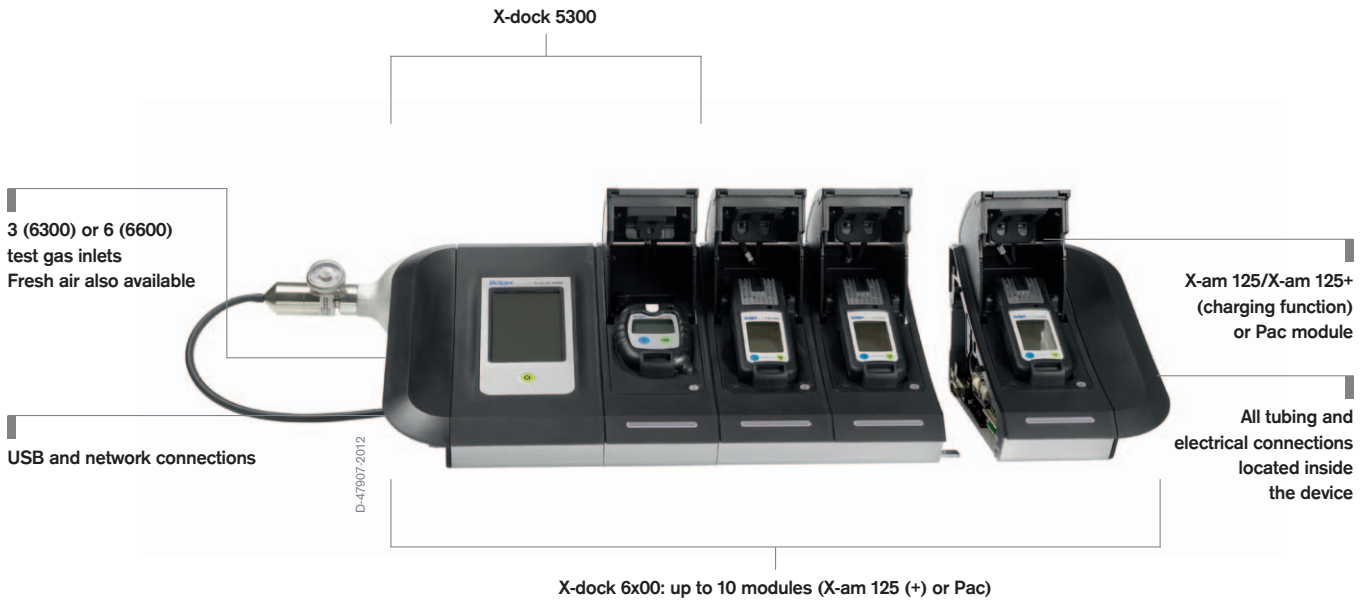

SIGNIFICANT TIME SAVINGS

Up to 10 modules can be connected to the X-dock at any given time, allowing you to test gas detection instruments simultaneously but also independently of each other. The automatic bump test also saves time, because the test only takes 8 to 15 seconds². All Dräger test gas cylinders are already stored in the database – entering the part number will automatically fill in the fields required for the gas configuration. This eliminates the need for manual data entry.

²⁾ For standard sensors: CH₄, O₂, CO, H₂S

OVERVIEW OF RESULTS

The additional „X-dock Manager“ software offers you even more comfort: It produces a detailed evaluation of the data in the calibration system and gas detection instruments, and presents the information in various graphics and statistics – providing you with a complete overview of all results. All connected X-dock systems can be connected in one network. Therefore, the data is not only stored locally in the system, but in a central database as well. With the X-dock manager you are always in control.

FURTHER BENEFITS

- Touchscreen operation at the master station
- Up to three configurable test routines
- Automatic leak tests
- Automatic tests of alarm elements (acoustic, visual and vibration alarms)
- Optional charging function for X-am 1/2/5x00
- Replaceable seal cartridge
- 12V operation (e.g., in vehicles) possible
- Can be subsequently expanded with up to 10 modules (X-dock 6300/6600)
- Evaluation of sensor response time

ACCESSORIES




Test gas cylinder holder with test gas cylinder
For securing the test gas cylinder to the X-dock Station.



Pressure reducer
For connection to the test gas cylinder.



Wall mount
Simple mounting option when fitted to a standard DIN rail.

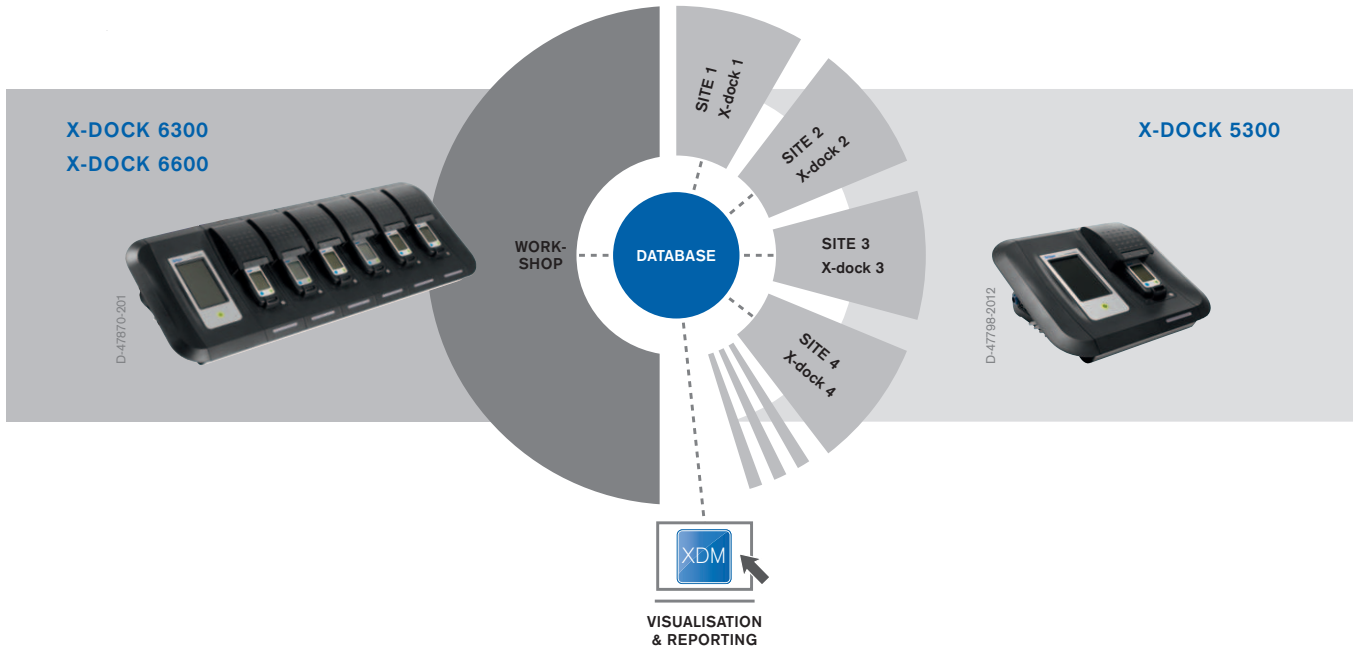

THE X-DOCK MANAGER OFFERS MUCH MORE

- An overview page which quickly compiles the most important information:
- Gas exposure in specific areas, number of conducted tests, device availability, overview of created/sent reports
- Templates for regular reports
- An issue and return function to allocate gas detection instruments to specific individuals
- Monitoring of stations within the network: All connected systems can be monitored
- (e.g., information on the gas configuration)
- Overview of devices: direct access to test reports and device configuration



TECHNICAL DATA

Dräger X-dock 5300/6300/6600

	X-dock Master	X-dock Module Pac	X-dock Module X-am 125	X-dock Module X-am 125+
Weight	Approx. 1500 g	Approx. 900 g	Approx. 920 g	Approx. 960 g
X-dock Master dimensions	Approx. 120 x 130 x 250 mm			
X-dock Module dimensions	Approx. 90 x 145 x 250 mm			
Protection class IP20	Yes			
Power supply	Via 24 V (8321849 & 8321850) power supply or car adapter			
Approvals	CE marking			
Ambient conditions	0 °C to 40 °C			
Gas connections				
Dräger X-dock 5300 / 6300	3 test gas inlets for connecting 3 different test gases + one fresh air inlet + one waste gas outlet			
Dräger X-dock 6600	6 test gas inlets for connecting 6 different test gases + one fresh air inlet + one waste gas outlet			
Connections				
USB 2.0	3 USB 2.0 devices/1 USB host			
Network connection	Yes			

ORDERING INFORMATION**Ready-to-use versions**

X-dock 5300 X-am 125	X-dock Master including X-am 125 module and power supply. 3 test gas connections. Limited to one module.	8321880
X-dock 5300 Pac	X-dock Master with Pac module and power supply. 3 test gas connections. Limited to one module.	8321881

Master versions

X-dock 6300 Master	3 test gas connections. Can be expanded to 10 modules	8321900
X-dock 6600 Master	6 test gas connections. Can be expanded to 10 modules	8321901

Modular versions

X-dock Module X-am 125		8321890
X-dock Module X-am 125+	allows charging X-am 125 devices	8321891
X-dock Module Pac		8321892

Power supply

24 V/1.3 A plug-in power supply	Up to 3 modules	8321849
24 V/5 A plug-in power supply	Up to 10 modules	8321850
12 V car adapter supply		8321855

X-dock Managers

Dräger X-dock Manager Standard		8321860
Dräger X-dock Manager Professional		8321870
Additional licence for Dräger X-dock Managers (both versions)		8321857
5 additional licences for Dräger X-dock Managers (both versions)		8321858

Accessories

0.5 bar constant-pressure valve for test gas cylinder		8321856
Wall mount, standard		8321922
Wall mount, comfort (adjustable tilt angle)		8321910
X-am 125 module seal cartridge		8321986
Pac Module seal cartridge		8321987
Filter for fresh air pump inlet		8319364
Viton hose		1203150
Cylinder holder (table version)		8321918
Cylinder holder for DIN rail/wall mount		8321928
Outer barcode label 22 x 8 mm (500 pcs. per roll)		AG 02551
Barcode scanner	CINO FBC6860LR	8318792

HEADQUARTERS

Dräger Safety AG & Co. KGaA
Revalstrasse 1
23560 Lübeck, Germany

www.draeger.com

SUBSIDIARIES**AUSTRALIA**

Draeger Safety Pacific Pty. Ltd.
Axxess Corporate Park
Unit 99, 45 Gilby Road
Mt. Waverley Vic 3149
Tel +61 3 92 65 50 00
Fax +61 3 92 65 50 95

CANADA

Draeger Safety Canada Ltd.
7555 Danbro Crescent
Mississauga, Ontario L5N 6P9
Tel +1 905 821 8988
Fax +1 905 821 2565

P. R. CHINA

Beijing Fortune Draeger Safety
Equipment Co., Ltd.
A22 Yu An Rd, B Area,
Tianzhu Airport Industrial Zone,
Shunyi District, Beijing 101300
Tel +86 10 80 49 80 00
Fax +86 10 80 49 80 05

FRANCE

Dräger Safety France SAS
3c route de la Fédération,
BP 80141
67025 Strasbourg Cedex 1
Tel +33 3 88 40 59 29
Fax +33 3 88 40 76 67

ITALY

Draeger Safety Italia S.p.A
Via Longarone 35
20080 Zibido San Giacomo (MI),
Italy
Tel +39 02 90 59 49 1
Fax +39 02 90 00 36 86

MEXICO

Draeger Safety S.A. de C.V.
Av. Peñuelas No. 5 Bodega No.
37
Fraccionamiento Industrial
San Pedrito
Querétaro, Qro México
Tel +52 442 246-1113
Fax +52 442 246-1114

NETHERLANDS

Dräger Safety Nederland B.V.
Edisonstraat 53
2700 AH Zoetermeer
Tel +31 79 344 46 66
Fax +31 79 344 47 90

REP. OF SOUTH AFRICA

Dräger South Africa (Pty) Ltd.
P.O.Box 68601
Bryanston 2021
Tel +27 11 465 99 59
Fax +27 11 465 69 53

SINGAPORE

Draeger Safety Asia Pte Ltd
67 Ayer Rajah Crescent
#06-03
Singapore 139950
Tel +65 68 72 92 88
Fax +65 65 12 19 08

SPAIN

Dräger Safety Hispania S.A.
Calle Xaudaró 5
28034 Madrid
Tel +34 91 728 34 00
Fax +34 91 729 48 99

UNITED KINGDOM

Draeger Safety UK Ltd.
Blyth Riverside Business Park
Blyth, Northumberland
NE24 4RG
Tel +44 1670 352-891
Fax +44 1670 356-266

USA

Draeger Safety, Inc.
101 Technology Drive
Pittsburgh, PA 15275
Tel +1 412 787 8383
Fax +1 412 787 2207